

OASIS **HUMIZONE** QUICK SETUP GUIDE

Setting up the Oasis HumiZone can be done by someone who is handy. If you are not comfortable or don't have easy access to a water and drain source it is recommended that you have a plumber do the installation.

REVERSE OSMOSIS SYSTEM


The RO System can be located near the HumiZone or in another room which has a water source.

- 1) Connect Male Elbow to RO System Water Feed IN facing down.
- 2) Remove the Black Plug and insert the Black Tubing. This is a drain line and may go directly into a drain hole or can be attached to a drain pipe near your water source using the Drain Saddle Included.
- 3) Connect Male Elbow with Red Plug to RO System OUT facing up. Remove the Red Plug and connect the Red Tubing and make sure it is locked into the Quick Connect valve.
- 4) Remove the Blue Plug for the water going OUT to the HumiZone (RO says Faucet).



HUMIZONE

- 1) Install on Wall.
- 2) Install the Overflow and OUT Valves using Teflon Tape.
- 3) Connect tubing to this and run to drain.
- 4) Install the Push Fit Connector with the ON/OFF valve to the IN Connection using Teflon Tape. This connection must be very tight.
- 5) Connect the HUMIZONE to the RO System using tubing supplied.
- 6) Connect the RO System to the Water Feed and Turn on.

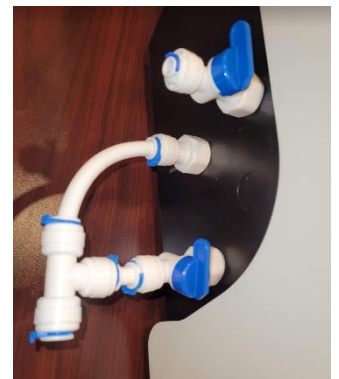

Complete Manuals are located at <https://www.oasishumizone.com>.

These manuals include important instructions for cleaning the HumiZone System as well as cleaning, cartridge use and replacements for the Reverse Osmosis System.